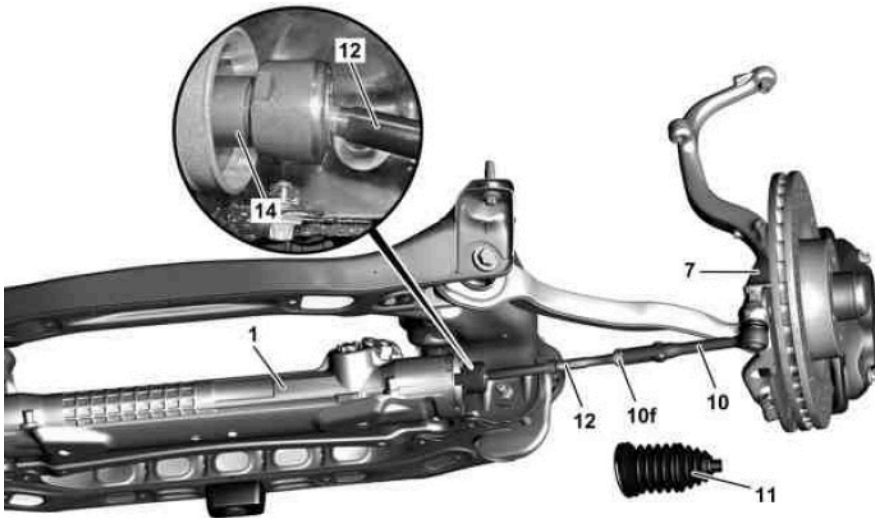






Mercedes Benz C 250 Sedán 2013 (204.047) L4-1.8L Turbo (271.860)

Vehículo > Dirección y suspensión > Dirección > Mecanismo de dirección > Servicio y reparación > Desmontaje y sustitución

AR46.40-P-0201CW Extracción/Instalación de la rótula de dirección interior con junta axial

MODELO 172, 204, 207 1 Dirección de cremallera y piñón 7 Mangueta de dirección 10
Rótula de dirección 10 Tuerca de seguridad 11 Fuelle 12 Barra de acoplamiento interior 14
Cremallera dentada



	Remove/install		
1	Detach boot (11)	except CODE 211 (Direct-Steer system) With CODE 211 (Direct steering)	AR46.40-P-0400CW AR46.40-P-0400EW
2	Release and unscrew tie rod (12) from rack-and-pinion steering (1)	 For vehicles with hydraulic power steering, the toothed rack (14) must be counterheld when releasing and tightening the inside tie rod (12).  MODEL 172  MODEL 204, 207	*BA46.40-P-1003-01E *BA46.40-P-1003-01N
3	Install in the reverse order		

 Tie rod

Number	Designation		MODEL 204	MODEL 207
BA46.40-P-1003-01N	Inner tie rod to rack-and-pinion steering	Nm	110	110

 Tie rod

Number	Designation		MODEL 172
BA46.40-P-1003-01E	Inner track rod with axial joint to rack-and-pinion joint	Nm	110